

# Pipe & Pilings



## PROJECT OVERVIEW


We recently completed a pipe piling project for permanent props and support structures. This included detailing, supply, fabrication, blasting and painting, assembly and transportation to site.

Part of the scope was for rolling & fabrication of this as follows:

- One 762x25CHS prop by 24.7m long with one splice
- One 762x25CHS prop by 25.7m long with one splice
- Eight 762x25CHS props by 27.2m long with one splice
- Two 762x25CHS prop by 29.8m long with two splices
- One 762x25CHS prop by 22.0m long with one splice
- One 762x25CHS prop by 21.5m long with one splice
- One 762x25CHS prop by 20.7m with one splice
- One 762x25CHS prop by 19.9m long with one splice
- One 762x25CHS prop by 19.1m long with one splice
- One 762x25CHS prop by 18.3m long with one splice
- Seven 762x12CHS props by 10.42m long

## PROJECT SPECIFICATION

Year	2020
Dimensions:	762mm (OD) x up to 30m
Design Pressure:	5100kPa/FV(Shell); 4000kPa(Tube)
Material	AS3678-250
Thickness	12mm / 25mm
Weight:	~250T

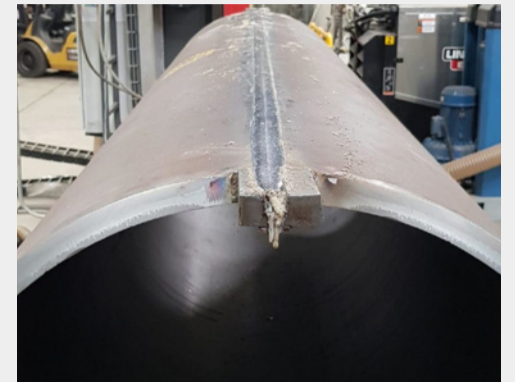

**thornton**  
*Depend on it*

### Project Enquiries

Craig Malt +61 (0) 3 5274 3180  
sales@thorntoneng.com.au

visit [thorntoneng.com.au](http://thorntoneng.com.au)

370 Bacchus Marsh Road  
Corio 3214, Vic Australia